

6.1 Modular Programming



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



Modular Programming

- Modular programming: breaking a program up into smaller, manageable functions or modules
- Function: a collection of statements to perform a task
- Motivation for modular programming:
 - Improves maintainability of programs
 - Simplifies the process of writing programs

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 4

This program has one long, complex function containing all of the statements necessary to solve a problem.

```

int main()
{
    statement;
    statement;
}

```

In this program the problem has been divided into smaller problems, each of which is handled by a separate function.

```

int main()
{
    statement;
    statement;
    statement;
}
main function

void function2()
{
    statement;
    statement;
    statement;
}
function 2

void function3()
{
    statement;
    statement;
    statement;
}
function 3

void function4()
{
    statement;
    statement;
    statement;
}
function 4

```


Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley
Slide 6- 5

6.2

Defining and Calling Functions

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Defining and Calling Functions




- Function call: statement causes a function to execute
- Function definition: statements that make up a function

Function Definition



- Definition includes:
 - return type: data type of the value that function returns to the part of the program that called it
 - name: name of the function. Function names follow same rules as variables
 - parameter list: variables containing values passed to the function
 - body: statements that perform the function's task, enclosed in { }

Function Definition

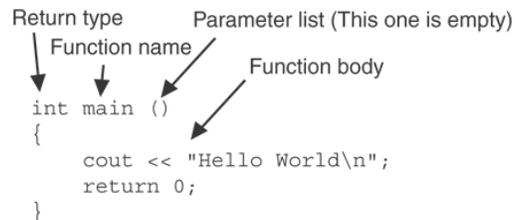

```
int main ()  
{  
    cout << "Hello World\n";  
    return 0;  
}
```


Note: The line that reads `int main()` is the function header.

Function Return Type

- If a function returns a value, the type of the value must be indicated:
`int main()`
- If a function does not return a value, its return type is `void`:

```
void printHeading()  
{  
    cout << "Monthly Sales\n";  
}
```

Calling a Function



- To call a function, use the function name followed by () and ;
`printHeading();`
- When called, program executes the body of the called function
- After the function terminates, execution resumes in the calling function at point of call.

Program 6-1

```
1 // This program has two functions: main and displayMessage
2 #include <iostream>
3 using namespace std;
4
5 //*****
6 // Definition of function displayMessage *
7 // This function displays a greeting. *
8 //*****
9
10 void displayMessage()
11 {
12     cout << "Hello from the function displayMessage.\n";
13 }
14
15 //*****
16 // Function main *
17 //*****
18
19 int main()
20 {
21     cout << "Hello from main.\n";
22     displayMessage();
23     cout << "Back in function main again.\n";
24     return 0;
25 }
```

Program Output

```
Hello from main.
Hello from the function displayMessage.
Back in function main again.
```



Flow of Control in Program 6-1

```
void displayMessage()
{
    cout << "Hello from the function displayMessage.\n";
}

int main()
{
    cout << "Hello from main.\n"
    displayMessage();
    cout << "Back in function main again.\n";
    return;
}
```

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-13

Calling Functions

- `main` can call any number of functions
- Functions can call other functions
- Compiler must know the following about a function before it is called:
 - name
 - return type
 - number of parameters
 - data type of each parameter

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-14



6.3 Function Prototypes



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



Function Prototypes

- Ways to notify the compiler about a function before a call to the function:
 - Place function definition before calling function's definition
 - Use a function prototype (function declaration)
 - like the function definition without the body
 - Header: `void printHeading()`
 - Prototype: `void printHeading();`

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 16



Program 6-5

```
1 // This program has three functions: main, First, and Second.
2 #include <iostream>
3 using namespace std;
4
5 // Function Prototypes
6 void first();
7 void second();
8
9 int main()
10 {
11     cout << "I am starting in function main.\n";
12     first(); // Call function first
13     second(); // Call function second
14     cout << "Back in function main again.\n";
15     return 0;
16 }
17
```

(Program Continues)



Program 6-5 (Continued)


```
18 //*****
19 // Definition of function first. *
20 // This function displays a message. *
21 //*****
22
23 void first()
24 {
25     cout << "I am now inside the function first.\n";
26 }
27
28 //*****
29 // Definition of function second. *
30 // This function displays a message. *
31 //*****
32
33 void second()
34 {
35     cout << "I am now inside the function second.\n";
36 }
```

Prototype Notes

- Place prototypes near top of program
- Program must include either prototype or full function definition before any call to the function – compiler error otherwise
- When using prototypes, can place function definitions in any order in source file

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-19



6.4

Sending Data into a Function



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



Sending Data into a Function

- Can pass values into a function at time of call:

```
c = pow(a, b);
```

- Values passed to function are arguments
- Variables in a function that hold the values passed as arguments are parameters

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 21


A Function with a Parameter Variable

```
void displayValue(int num)
{
    cout << "The value is " << num << endl;
}
```

The integer variable `num` is a parameter.
It accepts any integer value passed to the function.

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley


Slide 6- 22



Program 6-6

```
1 // This program demonstrates a function with a parameter.
2 #include <iostream>
3 using namespace std;
4
5 // Function Prototype
6 void displayValue(int);
7
8 int main()
9 {
10     cout << "I am passing 5 to displayValue.\n";
11     displayValue(5); // Call displayValue with argument 5
12     cout << "Now I am back in main.\n";
13     return 0;
14 }
15
```

(Program Continues)




Program 6-6 *(continued)*

```
16 //*****
17 // Definition of function displayValue. *
18 // It uses an integer parameter whose value is displayed. *
19 //*****
20
21 void displayValue(int num)
22 {
23     cout << "The value is " << num << endl;
24 }
```

Program Output

```
I am passing 5 to displayValue.
The value is 5
Now I am back in main.
```



```
displayValue(5);
```



```
void displayValue(int num)
{
    cout << "The value is " << num << endl;
}
```


The function call in line 11 passes the value 5 as an argument to the function.



Other Parameter Terminology

- A parameter can also be called a formal parameter or a formal argument
- An argument can also be called an actual parameter or an actual argument

Parameters, Prototypes, and Function Headers



- For each function argument,
 - the prototype must include the data type of each parameter inside its parentheses
 - the header must include a declaration for each parameter in its ()

```
void evenOrOdd(int); //prototype
void evenOrOdd(int num) //header
evenOrOdd(val); //call
```

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 27

Function Call Notes




- Value of argument is copied into parameter when the function is called
- A parameter's scope is the function which uses it
- Function can have multiple parameters
- There must be a data type listed in the prototype () and an argument declaration in the function header () for each parameter
- Arguments will be promoted/demoted as necessary to match parameters

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 28

Passing Multiple Arguments



When calling a function and passing multiple arguments:

- the number of arguments in the call must match the prototype and definition
- the first argument will be used to initialize the first parameter, the second argument to initialize the second parameter, etc.

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 29

Program 6-8

```
1 // This program demonstrates a function with three parameters.
2 #include <iostream>
3 using namespace std;
4
5 // Function Prototype
6 void showSum(int, int, int);
7
8 int main()
9 {
10     int value1, value2, value3;
11
12     // Get three integers.
13     cout << "Enter three integers and I will display ";
14     cout << "their sum: ";
15     cin >> value1 >> value2 >> value3;
16
17     // Call showSum passing three arguments.
18     showSum(value1, value2, value3);
19     return 0;
20 }
21
```




(Program Continues)

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 30

Program 6-8 (Continued)



```
22 //*****
23 // Definition of function showSum.
24 // It uses three integer parameters. Their sum is displayed. *
25 //*****
26
27 void showSum(int num1, int num2, int num3)
28 {
29     cout << (num1 + num2 + num3) << endl;
30 }
```

Program Output with Example Input Shown in Bold

Enter three integers and I will display their sum: **4 8 7 [Enter]**
19

Function Call → showSum(value1, value2, value3)

```
void showSum(int num1, int num2, int num3)
{
    cout << (num1 + num2 + num3) << endl;
}
```

The function call in line 18 passes value1, value2, and value3 as arguments to the function.



6.5 Passing Data by Value



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley




Passing Data by Value

- Pass by value: when an argument is passed to a function, its value is copied into the parameter.
- Changes to the parameter in the function do not affect the value of the argument

Slide 6- 34

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Passing Information to Parameters by Value



- Example:

```
int val=5;
evenOrOdd(val);
```



- evenOrOdd can change variable num, but it will have no effect on variable val

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-35


6.6

Using Functions in Menu-Driven Programs



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Using Functions in Menu-Driven Programs



- Functions can be used
 - to implement user choices from menu
 - to implement general-purpose tasks:
 - Higher-level functions can call general-purpose functions, minimizing the total number of functions and speeding program development time
- *See Program 6-10 in the book*

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-37


6.7

The return Statement



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

The `return` Statement



- Used to end execution of a function
- Can be placed anywhere in a function
 - Statements that follow the `return` statement will not be executed
- Can be used to prevent abnormal termination of program
- In a `void` function without a `return` statement, the function ends at its last }

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 39

Program 6-11

```
1 // This program uses a function to perform division. If division
2 // by zero is detected, the function returns.
3 #include <iostream>
4 using namespace std;
5
6 // Function prototype.
7 void divide(double, double);
8
9 int main()
10 {
11     double num1, num2;
12
13     cout << "Enter two numbers and I will divide the first\n";
14     cout << "number by the second number: ";
15     cin >> num1 >> num2;
16     divide(num1, num2);
17     return 0;
18 }
```

(Program Continues)

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 40

Program 6-11(Continued)


```
20 //*****
21 // Definition of function divide.                *
22 // Uses two parameters: arg1 and arg2. The function divides arg1*
23 // by arg2 and shows the result. If arg2 is zero, however, the *
24 // function returns.                                *
25 //*****
26
27 void divide(double arg1, double arg2)
28 {
29     if (arg2 == 0.0)
30     {
31         cout << "Sorry, I cannot divide by zero.\n";
32         return;
33     }
34     cout << "The quotient is " << (arg1 / arg2) << endl;
35 }
```

Program Output with Example Input Shown in Bold
Enter two numbers and I will divide the first
number by the second number: **12 0 [Enter]**
Sorry, I cannot divide by zero.

6.8

Returning a Value From a Function

Returning a Value From a Function



- A function can return a value back to the statement that called the function.
- You've already seen the `pow` function, which returns a value:

```
double x;  
x = pow(2.0, 10.0);
```


Returning a Value From a Function



- In a value-returning function, the `return` statement can be used to return a value from function to the point of call. Example:

```
int sum(int num1, int num2)  
{  
    double result;  
    result = num1 + num2;  
    return result;  
}
```

A Value-Returning Function



Return Type

```
int sum(int num1, int num2)
{
    double result;
    result = num1 + num2;
    return result;
}
```

Value Being Returned

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 45

A Value-Returning Function



```
int sum(int num1, int num2)
{
    return num1 + num2;
}
```

Functions can return the values of expressions, such as `num1 + num2`

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 46



Program 6-12

```
1 // This program uses a function that returns a value.
2 #include <iostream>
3 using namespace std;
4
5 // Function prototype
6 int sum(int, int);
7
8 int main()
9 {
10     int value1 = 20, // The first value
11         value2 = 40, // The second value
12         total;      // To hold the total
13
14     // Call the sum function, passing the contents of
15     // value1 and value2 as arguments. Assign the return
16     // value to the total variable.
17     total = sum(value1, value2);
18
19     // Display the sum of the values.
20     cout << "The sum of " << value1 << " and "
21          << value2 << " is " << total << endl;
22     return 0;
23 }
```

(Program Continues)




Program 6-12 (Continued)

```
24
25 //*****
26 // Definition of function sum. This function returns *
27 // the sum of its two parameters. *
28 //*****
29
30 int sum(int num1, int num2)
31 {
32     return num1 + num2;
33 }
```



Program Output

The sum of 20 and 40 is 60

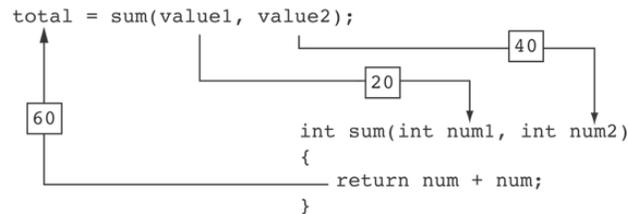

The statement in line 17 calls the sum function, passing `value1` and `value2` as arguments. The return value is assigned to the `total` variable.

Another Example, from Program 6-13

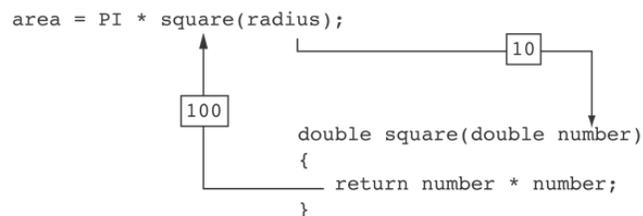


Returning a Value From a Function

- The prototype and the definition must indicate the data type of return value (not `void`)
- Calling function should use return value:
 - assign it to a variable
 - send it to `cout`
 - use it in an expression

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-51



6.9

Returning a Boolean Value




Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



Returning a Boolean Value

- Function can return `true` or `false`
- Declare return type in function prototype and heading as `bool`
- Function body must contain `return` statement(s) that return `true` or `false`
- Calling function can use return value in a relational expression



Program 6-14

```
1 // This program uses a function that returns true or false.
2 #include <iostream>
3 using namespace std;
4
5 // Function prototype
6 bool isEven(int);
7
8 int main()
9 {
10     int val;
11
12     // Get a number from the user.
13     cout << "Enter an integer and I will tell you ";
14     cout << "if it is even or odd: ";
15     cin >> val;
16
```

(Program Continues)





Program 6-14 (continued)


```

17 // Indicate whether it is even or odd.
18 if (isEven(val))
19     cout << val << " is even.\n";
20 else
21     cout << val << " is odd.\n";
22 return 0;
23 }
24
25 //*****
26 // Definition of function isEven. This function accepts an *
27 // integer argument and tests it to be even or odd. The function *
28 // returns true if the argument is even or false if the argument *
29 // is odd. The return value is an bool. *
30 //*****
31
32 bool isEven(int number)
33 {
34     bool status;
35
36     if (number % 2)
37         status = false; // number is odd if there's a remainder.
38     else
39         status = true; // Otherwise, the number is even.
40     return status;
41 }

```

Program Output with Example Input Shown In Bold

Enter an integer and I will tell you if it is even or odd: **5 [Enter]**
5 is odd.




6.10

Local and Global Variables



Local and Global Variables



- Variables defined inside a function are *local* to that function. They are hidden from the statements in other functions, which normally cannot access them.
- Because the variables defined in a function are hidden, other functions may have separate, distinct variables with the same name.

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 57

Program 6-15

```
1 // This program shows that variables defined in a function
2 // are hidden from other functions.
3 #include <iostream>
4 using namespace std;
5
6 void anotherFunction(); // Function prototype
7
8 int main()
9 {
10     int num = 1; // Local variable
11
12     cout << "In main, num is " << num << endl;
13     anotherFunction();
14     cout << "Back in main, num is " << num << endl;
15     return 0;
16 }
17
18 //*****
19 // Definition of anotherFunction *
20 // It has a local variable, num, whose initial value *
21 // is displayed. *
22 //*****
23
24 void anotherFunction()
25 {
26     int num = 20; // Local variable
27
28     cout << "In anotherFunction, num is " << num << endl;
29 }
```



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley


Slide 6- 58



Program Output

```
In main, num is 1  
In anotherFunction, num is 20  
Back in main, num is 1
```


When the program is executing in `main`, the `num` variable defined in `main` is visible. When `anotherFunction` is called, however, only variables defined inside it are visible, so the `num` variable in `main` is hidden.

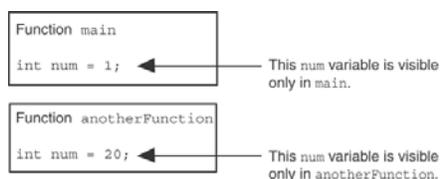

Local Variable Lifetime

- A function's local variables exist only while the function is executing. This is known as the *lifetime* of a local variable.
- When the function begins, its local variables and its parameter variables are created in memory, and when the function ends, the local variables and parameter variables are destroyed.
- This means that any value stored in a local variable is lost between calls to the function in which the variable is declared.

Global Variables and Global Constants




- A global variable is any variable defined outside all the functions in a program.
- The scope of a global variable is the portion of the program from the variable definition to the end.
- This means that a global variable can be accessed by *all* functions that are defined after the global variable is defined.

Global Variables and Global Constants



- You should avoid using global variables because they make programs difficult to debug.
- Any global that you create should be *global constants*.



Program 6-18

```
1 // This program calculates gross
2 #include <iostream>
3 #include <iomanip>
4 using namespace std;
5
6 // Global constants
7 const double PAY_RATE = 22.55; // Hourly pay rate
8 const double BASE_HOURS = 40.0; // Max non-overtime hours
9 const double OT_MULTIPLIER = 1.5; // Overtime multiplier
10
11 // Function prototypes
12 double getBasePay(double);
13 double getOvertimePay(double);
14
15 int main()
16 {
17     double hours, // Hours worked
18           basePay, // Base pay
19           overtime = 0.0, // Overtime pay
20           totalPay; // Total pay
```

Global constants defined for values that do not change throughout the program's execution.

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 63



The constants are then used for those values throughout the program.

```
29 // Get overtime pay, if any.
30 if (hours > BASE_HOURS)
31     overtime = getOvertimePay(hours);
32
33
34
35
36 // Determine base pay.
37 if (hoursWorked > BASE_HOURS)
38     basePay = BASE_HOURS * PAY_RATE;
39 else
40     basePay = hoursWorked * PAY_RATE;
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75 // Determine overtime pay.
76 if (hoursWorked > BASE_HOURS)
77 {
78     overtimePay = (hoursWorked - BASE_HOURS) *
79                 PAY_RATE * OT_MULTIPLIER;
80 }
```

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 64

Initializing Local and Global Variables

- Local variables are not automatically initialized. They must be initialized by programmer.
- Global variables (not constants) are automatically initialized to 0 (numeric) or NULL (character) when the variable is defined.

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6-65


6.11

Static Local Variables



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Static Local Variables



- Local variables only exist while the function is executing. When the function terminates, the contents of local variables are lost.
- `static` local variables retain their contents between function calls.
- `static` local variables are defined and initialized only the first time the function is executed. `0` is the default initialization value.

Program 6-20

```
1 // This program shows that local variables do not retain
2 // their values between function calls.
3 #include <iostream>
4 using namespace std;
5
6 // Function prototype
7 void showLocal();
8
9 int main()
10 {
11     showLocal();
12     showLocal();
13     return 0;
14 }
15
```



(Program Continues)



Program 6-20 (continued)

```
16 //*****
17 // Definition of function showLocal. *
18 // The initial value of localNum, which is 5, is displayed. *
19 // The value of localNum is then changed to 99 before the *
20 // function returns. *
21 //*****
22
23 void showLocal()
24 {
25     int localNum = 5; // Local variable
26
27     cout << "localNum is " << localNum << endl;
28     localNum = 99;
29 }
```

Program Output

```
localNum is 5
localNum is 5
```

In this program, each time `showLocal` is called, the `localNum` variable is re-created and initialized with the value 5.

A Different Approach, Using a Static Variable



Program 6-21

```
1 // This program uses a static local variable.
2 #include <iostream>
3 using namespace std;
4
5 void showStatic(); // Function prototype
6
7 int main()
8 {
9     // Call the showStatic function five times.
10    for (int count = 0; count < 5; count++)
11        showStatic();
12    return 0;
13 }
14
```

(Program Continues)



Program 6-21 (continued)

```
15 //*****
16 // Definition of function showStatic. *
17 // statNum is a static local variable. Its value is displayed *
18 // and then incremented just before the function returns. *
19 //*****
20
21 void showStatic()
22 {
23     static int statNum;
24
25     cout << "statNum is " << statNum << endl;
26     statNum++;
27 }
```

Program Output

```
statNum is 0
statNum is 1
statNum is 2
statNum is 3
statNum is 4
```

statNum is automatically initialized to 0. Notice that it retains its value between function calls.

If you do initialize a local static variable, the initialization only happens once. See Program 6-22..



Program 6-22 (continued)

```
16 //*****
17 // Definition of function showStatic. *
18 // statNum is a static local variable. Its value is displayed *
19 // and then incremented just before the function returns. *
20 //*****
21
22 void showStatic()
23 {
24     static int statNum = 5;
25
26     cout << "statNum is " << statNum << endl;
27     statNum++;
28 }
```

Program Output


```
statNum is 5
statNum is 6
statNum is 7
statNum is 8
statNum is 9
```



6.12 Default Arguments



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



Default Arguments

A Default argument is an argument that is passed automatically to a parameter if the argument is missing on the function call.

- Must be a constant declared in prototype:

```
void evenOrOdd(int = 0);
```
- Can be declared in header if no prototype
- Multi-parameter functions may have default arguments for some or all of them:

```
int getSum(int, int=0, int=0);
```

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 74

Default arguments specified in the prototype

Program 6-23

```
1 // This program demonstrates default function arguments.
2 #include <iostream>
3 using namespace std;
4
5 // Function prototype with default arguments
6 void displayStars(int = 10, int = 1);
7
8 int main()
9 {
10     displayStars(); // Use default values for cols and rows.
11     cout << endl;
12     displayStars(5); // Use default value for rows.
13     cout << endl;
14     displayStars(7, 3); // Use 7 for cols and 3 for rows.
15     return 0;
16 }
```

(Program Continues)

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 75

Program 6-23 (Continued)

```
18 //*****
19 // Definition of function displayStars. *
20 // The default argument for cols is 10 and for rows is 1.*
21 // This function displays a square made of asterisks. *
22 //*****
23
24 void displayStars(int cols, int rows)
25 {
26     // Nested loop. The outer loop controls the rows
27     // and the inner loop controls the columns.
28     for (int down = 0; down < rows; down++)
29     {
30         for (int across = 0; across < cols; across++)
31             cout << "*";
32         cout << endl;
33     }
34 }
```

Program Output

```
*****
*****
*****
*****
```

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 76

Default Arguments

- If not all parameters to a function have default values, the defaultless ones are declared first in the parameter list:

```
int getSum(int, int=0, int=0); // OK
int getSum(int, int=0, int);  // NO
```


- When an argument is omitted from a function call, all arguments after it must also be omitted:

```
sum = getSum(num1, num2); // OK
sum = getSum(num1, , num3); // NO
```

6.13

Using Reference Variables as Parameters

Using Reference Variables as Parameters



- A mechanism that allows a function to work with the original argument from the function call, not a copy of the argument
- Allows the function to modify values stored in the calling environment
- Provides a way for the function to 'return' more than one value

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 79

Passing by Reference




- A reference variable is an alias for another variable
- Defined with an ampersand (&)

```
void getDimensions(int&, int&);
```
- Changes to a reference variable are made to the variable it refers to
- Use reference variables to implement passing parameters *by reference*

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 80

The & here in the prototype indicates that the parameter is a reference variable.



Program 6-24

```
1 // This program uses a reference variable as a function
2 // parameter.
3 #include <iostream>
4 using namespace std;
5
6 // Function prototype. The parameter is a reference variable.
7 void doubleNum(int &);
8
9 int main()
10 {
11     int value = 4;
12
13     cout << "In main, value is " << value << endl;
14     cout << "Now calling doubleNum..." << endl;
15     doubleNum(value);
16     cout << "Now back in main. value is " << value << endl;
17     return 0;
18 }
19
```

Here we are passing value by reference.

(Program Continues)

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 81

Program 6-24 (Continued)



The & also appears here in the function header.

```
20 /*******
21 // Definition of doubleNum. *
22 // The parameter refVar is a reference variable. The value *
23 // in refVar is doubled. *
24 /*******
25
26 void doubleNum (int &refVar)
27 {
28     refVar *= 2;
29 }
```

Program Output

```
In main, value is 4
Now calling doubleNum...
Now back in main. value is 8
```

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley


Slide 6- 82

Reference Variable Notes

- Each reference parameter must contain &
- Space between type and & is unimportant
- Must use & in both prototype and header
- Argument passed to reference parameter must be a variable – cannot be an expression or constant
- Use when appropriate – don't use when argument should not be changed by function, or if function needs to return only 1 value

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 83



6.14


Overloading Functions



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



Overloading Functions



- Overloaded functions have the same name but different parameter lists
- Can be used to create functions that perform the same task but take different parameter types or different number of parameters
- Compiler will determine which version of function to call by argument and parameter lists

Function Overloading Examples



Using these overloaded functions,

```
void getDimensions(int);           // 1
void getDimensions(int, int);      // 2
void getDimensions(int, double);   // 3
void getDimensions(double, double); // 4
```

the compiler will use them as follows:

```
int length, width;
double base, height;
getDimensions(length);           // 1
getDimensions(length, width);    // 2
getDimensions(length, height);   // 3
getDimensions(height, base);     // 4
```



Tony Gaddis

Program 6-26

```

1 // This program uses overloaded functions.
2 #include <iostream>
3 #include <iomanip>
4 using namespace std;
5
6 // Function prototypes
7 int square(int);
8 double square(double);
9
10 int main()
11 {
12     int userInt;
13     double userFloat;
14
15     // Get an int and a double.
16     cout << fixed << showpoint << setprecision(2);
17     cout << "Enter an integer and a floating-point value: ";
18     cin >> userInt >> userFloat;
19
20     // Display their squares.
21     cout << "Here are their squares: ";
22     cout << square(userInt) << " and " << square(userFloat);
23     return 0;
24 }

```

The overloaded functions have different parameter lists

Passing a double

Passing an int

(Program Continues)

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley Slide 6- 87

Program 6-26 (Continued)

```

26 //*****
27 // Definition of overloaded function square.
28 // This function uses an int parameter, number. It returns the *
29 // square of number as an int.
30 //*****
31
32 int square(int number)
33 {
34     return number * number;
35 }
36
37 //*****
38 // Definition of overloaded function square.
39 // This function uses a double parameter, number. It returns *
40 // the square of number as a double.
41 //*****
42
43 double square(double number)
44 {
45     return number * number;
46 }

```

Program Output with Example Input Shown in Bold

Enter an integer and a floating-point value: **12 4.2** [Enter]

Here are their squares: 144 and 17.64


Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley Slide 6- 88



6.15 The `exit()` Function



Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley



The `exit()` Function

- Terminates the execution of a program
- Can be called from any function
- Can pass an `int` value to operating system to indicate status of program termination
- Usually used for abnormal termination of program
- Requires `cstdlib` header file

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Slide 6- 90

The `exit()` Function


- Example:

```
exit(0);
```

- The `cstdlib` header defines two constants that are commonly passed, to indicate success or failure:

```
exit(EXIT_SUCCESS);
```

```
exit(EXIT_FAILURE);
```



6.16 Stubs and Drivers

Copyright © 2007 Pearson Education, Inc. Publishing as Pearson Addison-Wesley

Stubs and Drivers

- Useful for testing and debugging program and function logic and design
- Stub: A dummy function used in place of an actual function
 - Usually displays a message indicating it was called. May also display parameters
- Driver: A function that tests another function by calling it
 - Various arguments are passed and return values are tested

